


API 610 PROCESS PUMP

PUMP MODEL **R2, R2D**Catalog No. CS1330E*

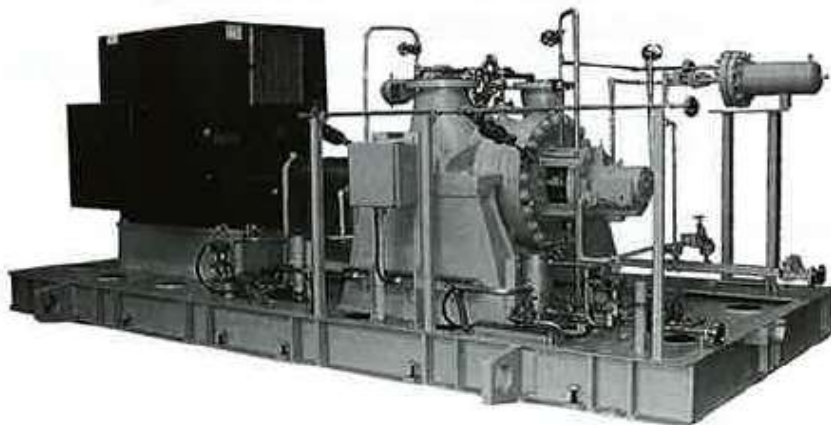

Design

Centerline support, Radial split
Two stage
Single or Double Volute casing
Opposed impeller arrangement
Double suction 1st impeller for R2D
Full compliance with API 610
Low NPSH performance for R2D

Application

Petroleum Refinery
Petrochemical Industry
Chemical Industry
Other Industries

Rating	
Capacity	upto 1500 m ³ /h (6600 U.S.gpm)
Head	upto 520 m (1700 ft)
Temperature	-100°C~+450°C (-150°F~+850°F)
Flange Rating	ANSI Class 300 lb as a standard Others are also available